


**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 11-19 HODGE PODGE  
T42N R6E SECTIONS 9, 10, 15 & 16  
HARVEST ACRES - 215**

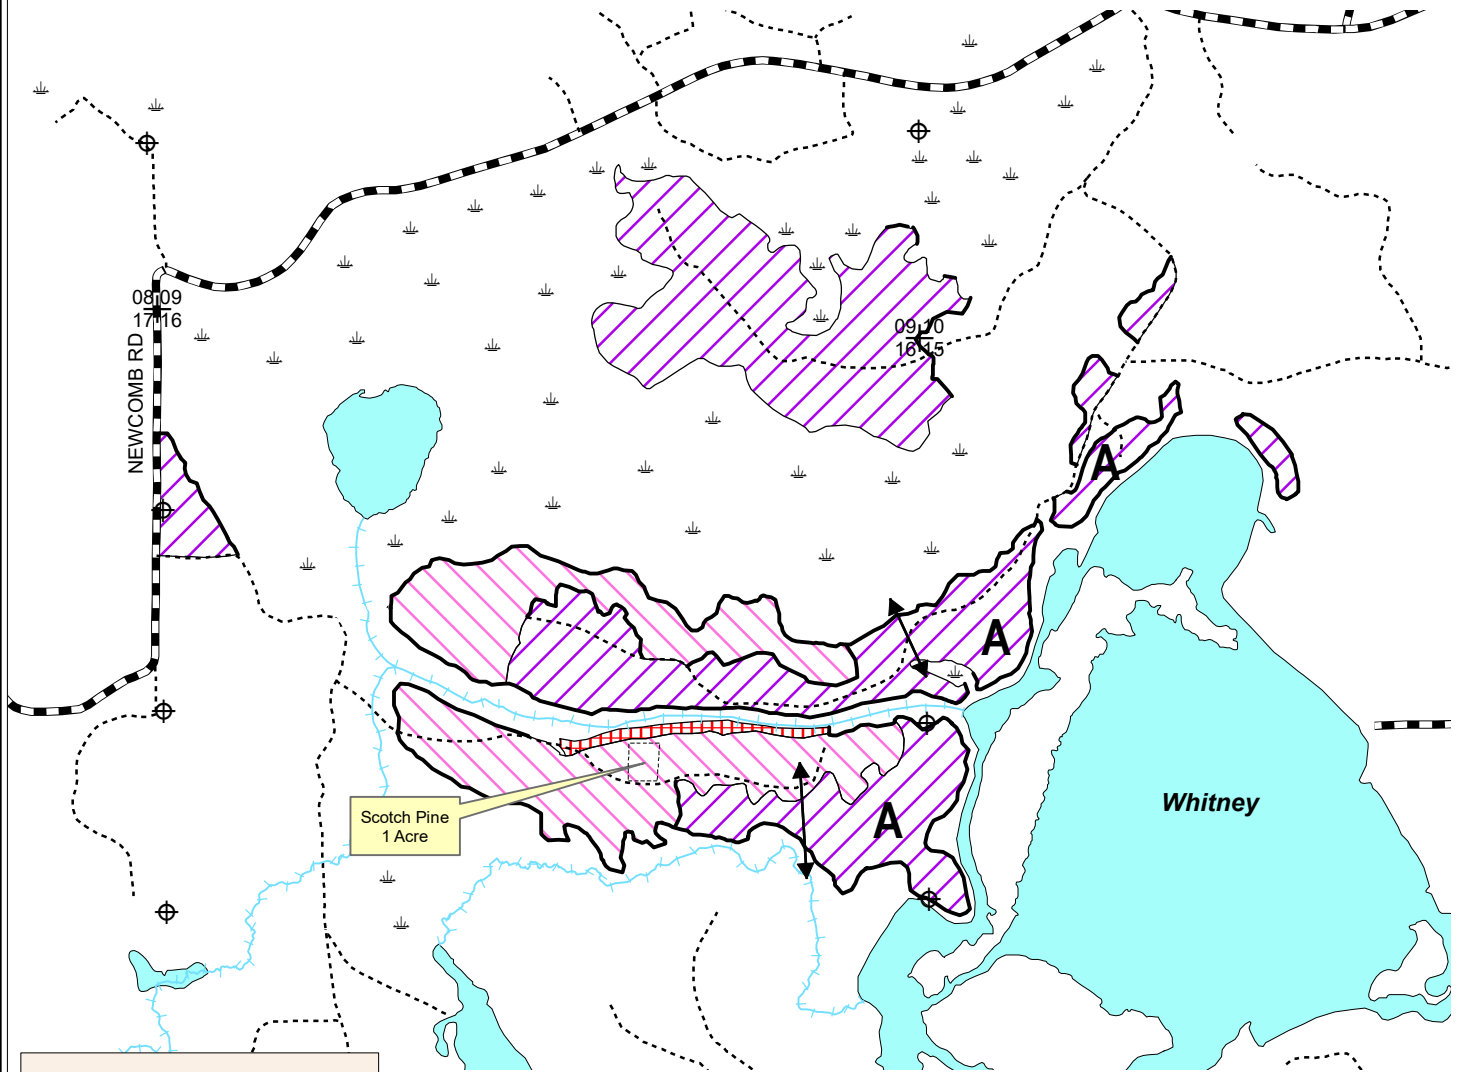

**Legend**

- ✚ Section Corner
- ⊕ Survey Marker
- ⚡ Keg/Swamp
- ↔ Zone A Boundary
- Red Line
- Rivers and Streams
- Woods Roads
- ▬ Highways and Town Roads
- Lakes

All stands are within Mgmt. Area 3:  
Vilas Sandy Plains North -  
Forest Production

- Aspen/Pine/Oak Areas (144 Acres): Cut all merchantable aspen, white birch, red maple, spruce, balsam fir, jack pine and scotch pine. Cut orange marked white pine, red pine and red oak. Cut the 2 to 5 inch balsam fir.
- Planting Site Area (68 Acres): Cut all species of trees greater than 2 inches in diameter unless marked with green paint.
- Creek Zone (3 Acres): Cut orange marked pine. Cut only those fir needed to access the marked pine.

***Oak Wilt Restriction: No harvest activity allowed  
in areas labeled Zone A from April 15 to July 15  
due to the risk of Oak Wilt.***

N  
Scale: 4" = 1 Mile  
1:15,840



Map produced by  
Todd Anderson &  
Paul Schultz, 2/19

This map is not a survey  
of the actual boundary of  
any property this map depicts.

NH-ALSF TRACT NO. 11-19  
Hodge Podge

Vilas County

Town 40 North, Range 7 East

Section 9 – SWSE, SESE

Section 10 – SWSW, SWSE

Section 15 – GOVT LOT 1, 5, 6, NENW, NWNW

Section 16 – SENW, NESW, NESE, NWSE

The cutting area is approximately 215 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum top diameter chosen by the bidder will be cut and utilized.

Whole tree harvest is not allowed.

---

ESTIMATED VOLUME (TONS)  
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Advertised Price</u> <u>Per Ton</u>
White Pine	400	\$ 14.50
Red Pine	310	\$ 14.50
Balsam Fir <sup>1</sup>	1050	\$ 8.50
Spruce	480	\$ 13.60
Aspen	1775	\$ 18.70
Mixed Hardwood <sup>2</sup>	2180	\$ 16.20

ESTIMATED VOLUME MBF

		<u>Advertised Price</u> <u>Per MBF</u>
White Pine	400	\$ 119.00
Red Pine <sup>3</sup>	295	\$ 145.00
Mixed Hardwood <sup>4</sup>	56	\$ 278.00

**Total Minimum Bid Value      \$ 200,199.50**

---

1\ F - 970 tons Balsam Fir and 80 tons Scotch Pine. Weighted average = 2.134 tons/cord.

2\ MX - 1415 tons Red Maple, 630 tons White Birch, 120 tons Red Oak, 8 tons Black Cherry, 7 tons Sugar Maple. Weighted average = 2.334 tons/cord.

3\ PR - 263 MBF Red Pine and 32 MBF Spruce.

4\ MX - 32 MBF White Birch and 24 MBF Red Oak

Sale volume equates to approximately 47.5 tons/acre or 20.2 cords/acre.

Special Conditions

1. In areas labeled Zone A all harvesting and skidding activity will only be allowed between July 15 and April 15 due to oak wilt restrictions.
2. Whole tree chipping and biomass harvesting is not permitted.
3. All landings and any new roads must be approved prior to sale start up. All roads must be restored to pre-harvest condition upon sale completion.
4. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
5. Cutting must be concurrent for all species to be harvested. All standing dead snags must remain standing unless they pose a hazard to operator safety.